
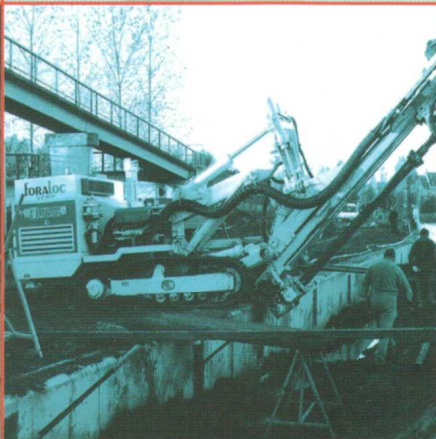
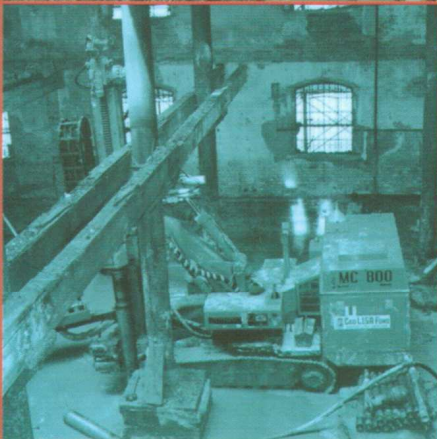
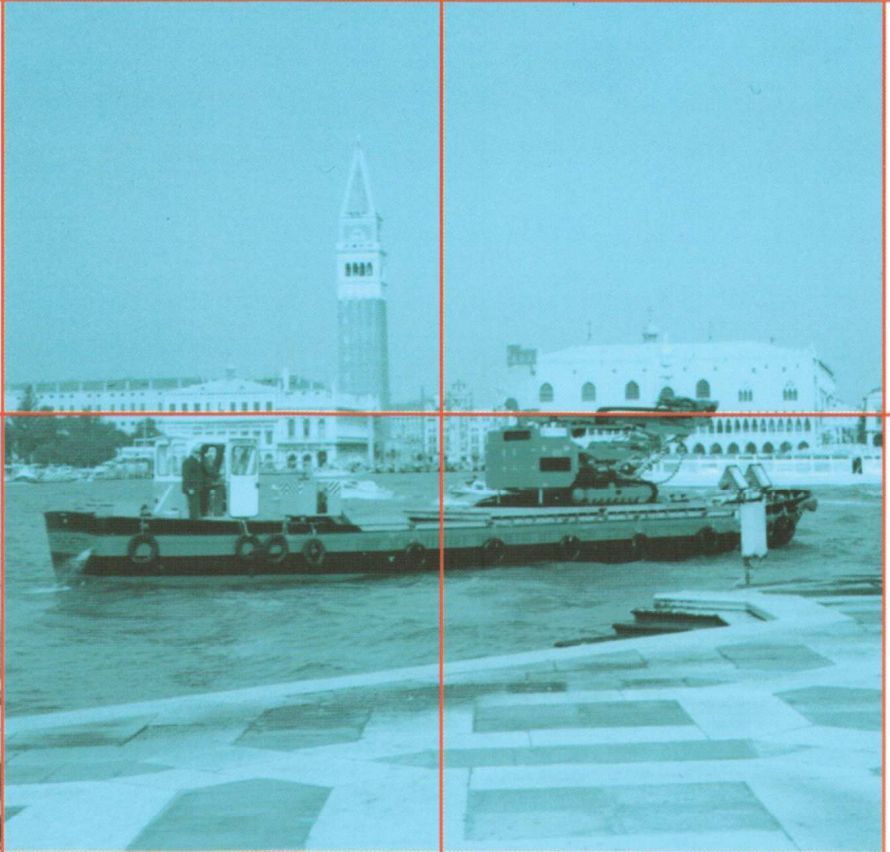


MC 800

Perforatrice
Idraulica

Hydraulic
drill rig

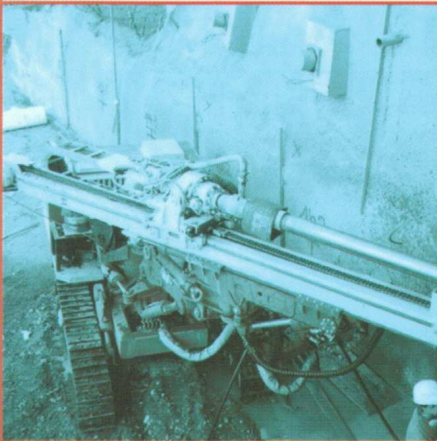

Foreuse
Hydraulique

Hydraulische
Bohrmaschine



COMACCHIO

DRILLING AND FOUNDATION
EQUIPMENT SPECIALIST



**MC
800**

Dati Tecnici • Technical Data Caractéristiques Techniques • Technische Daten



Carro cingolato

Passo cingolo	Wheel base	Enpattement	Fahrwerk	2.000 mm	6,5 ft
Larghezza max.	Max width	Largeur max.	Gesamtbreite	2.100 mm	6,9 ft
Larghezza suole	Pad width	Largeur patins	Fussbreite	400 mm	15,7 in
Pendenza max.	Max. climbing ability	Pente max.	Steighähigkeit max.	50 %	
Velocità max.	Max. speed	Vitesse max.	Fahrgeschwindigkeit	1,5 Km/h	0,93 mph

Centrale idraulica

Motore diesel	Diesel engine	Moteur diesel	Dieselmotor	DEUTZ BF4M 2012C	
Potenza motore	Engine power	Puissance moteur	Entriebsleistune	88 Kw (120 HP) / 2300 rpm	
Pompa principale	Main pump	Pompe principale	Hydraulische Leistung	160 lt/min	42,3 gal/min.
Serbatoio olio	Oil tank	Réservoir huile	Oiltank	350 lt.	92,5 gal
Serbatoio gasolio	Fuel tank	Réservoir diesel	Dieseltankinhalt	150 lt.	39,5 gal

Mast

Corsa utile	Feed stroke	Course utile	Vorschub	2.500/4.000 mm	8,2/13,1 ft
Lunghezza totale	Total length	Longueur totale	Gesamtlänge	4.215/5.715 mm	13,8/18,7 ft
Forza di spinta	Feed force	Poussée	Vorschubkraft	6.000 daN	13,488 lbs
Forza di tiro	Retract force	Traction	Rückzugkraft	6.000 daN	13,488 lbs

Power pack

Centrale hydraulique

Hydraulikaggregat

Mast

Mat

Lafette

Testa di rotazione

Marce	Gears	Vitesses	Schaltstufe	6	
Coppia max.	Max torque	Couple max.	Drehmoment max.	1.100 daNm	8,113 lb*ft
Giri max.	Max speed	Vitesse max.	Drehzahl max.	430 (*600) rpm	
Passaggio testa	Head passage	Passage tête	Drehkopfdurchgang	79 (*93) mm	3,1 (*3,6) in
Passaggio girevole	Swivel passage	Passage joint tournant	Spulkopfdurchgang	1" 1/2	

Rotary head

Tête de rotation

Drehkopf

Morse

Diametro min. di presa	Min. handing	Tige/diamètre min.	Durchmesser min.	45 mm	1,8 in
Diametro max. di presa	Max. handing	Tige/diamètre max.	Durchmesser max.	260 (*300) mm	10,2 (*11,8) in
Forza di chiusura	Clamping force	Force de serrage	Klemmkraft	180 KN	40,465 lbs
Coppia svitaggio	Breaking torque	Couple de deserrage	Brechvorrichtung	1.500 daNm	11,063 lb*ft

Clamps

Mors

Klemm

Argano

Tiro max.	Max line pull	Force de levage	Max. zugkraft	2.000 daN	4,496 lbs
Capacità fune	Drum capacity	Câble au tambour	Seillänge	50 mt.	164 ft
Velocità fune	Rope speed	Vitesse au retrait	Seilgeschwindigkeit	30 mt./min.	98 ft/min
Diametro fune	Rope diameter	Diamètre du câble	Seildurchmesser	10 mm	0,39 in

Winch

Treuil

Seilwinde

Ingombri

Lunghezza	Length	Longueur	Länge	7.300 mm	23,9 ft
Larghezza	Width	Largeur	Breite	2.100 mm	6,9 ft
Altezza	Height	Hauteur	Höhe	2.700 mm	8,9 ft

Dimensions

Dimensions

Aussenabmessungen

Peso


Weight

Poids

Gewicht

11.000 Kg 22,000 lbs





(*) Opzionale • Optional • Option • Option

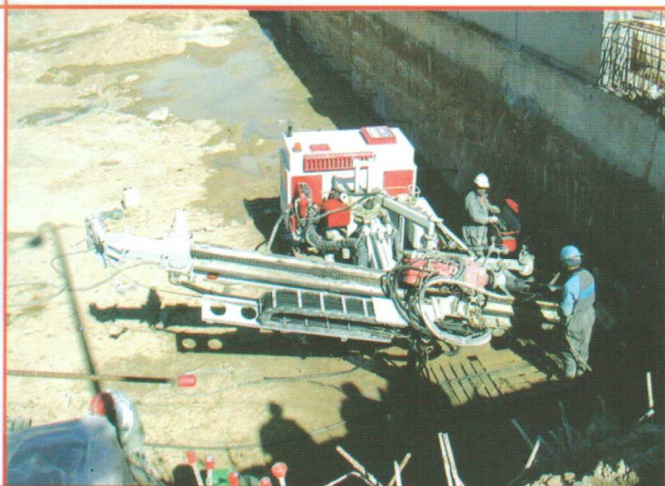




MC
800

Dimensioni di Ingombro • Overall Dimensions
Dimensions • Aussenabmessungen

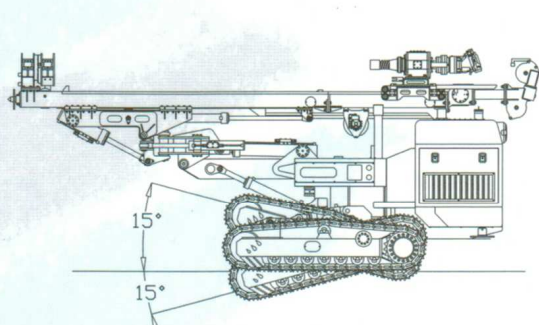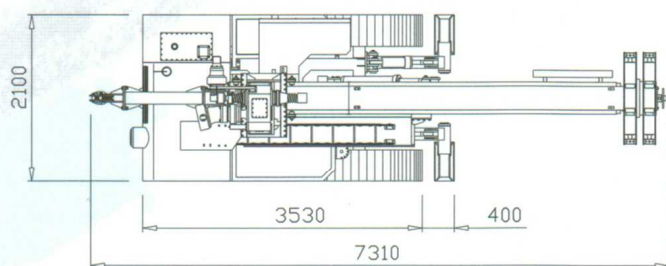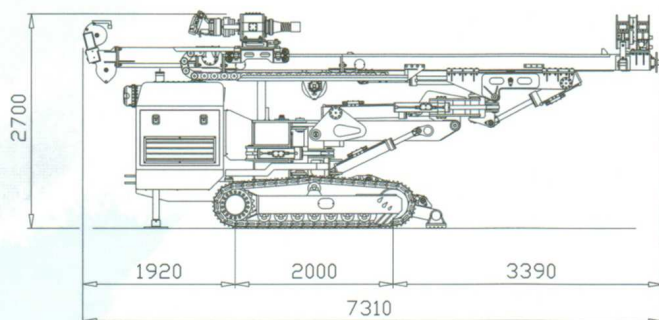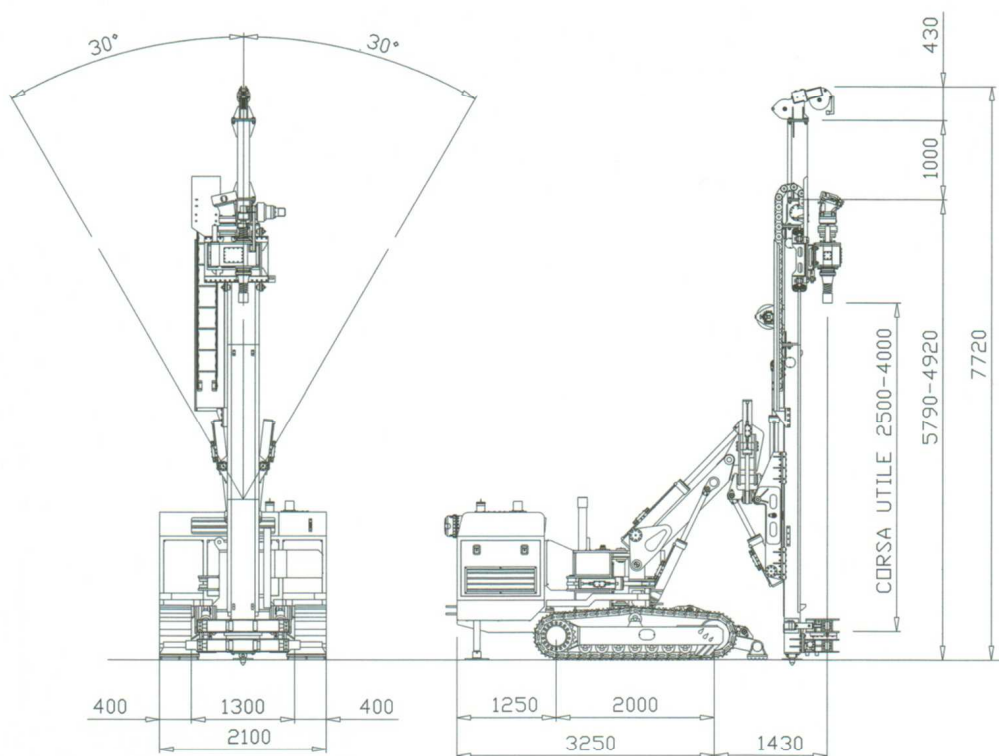

OPTIONAL

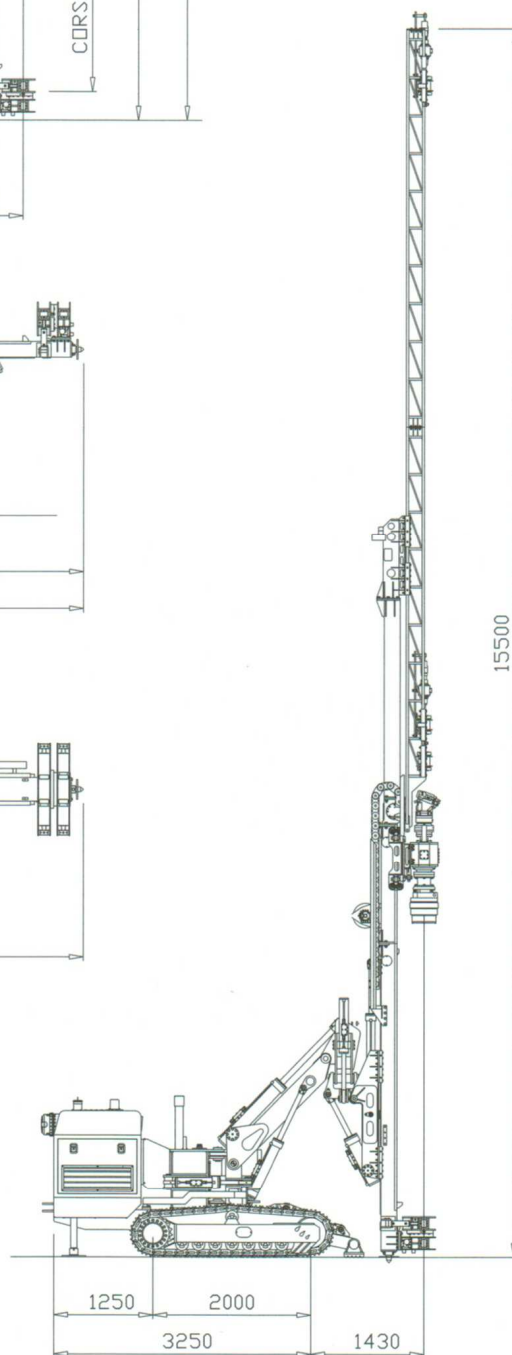

JET GROUTING CONFIGURATION

